

GENERAL DESCRIPTION

Door, frame and accessories, in a single system, easy to transport and install.
Available on request with 32dB acoustic insulation.
Product suitable for interior decoration.

ACCREDITATION

Acoustic insulation as per ISO 10140.
Acoustic classification as per ISO 717-1.

DOOR

Perimeter structure in hardwood rails and stiles, features according to standard EN 13986.
Honeycomb core with 2.2 kg / cm² average strength or chipboard, features according to EN 13986.
Facing in MDF, features according to standard EN 13986.
Lippings in dense wood, wood veneer, foil finish or painted to match facing.
Thicknesses: 35 and 40mm.
Available in the models of the Essential, Exclusive and Classic ranges.
MDF panels, opening for glazing with profiles in wood or with a finish to match facing.

FRAME

Plywood or MDF jamb, features according to EN 13986.
Adjustable architrave allowing variation in wall thickness, features according to EN 13986.
Rubber seal.
Carton packaging with product identification.

FINISHES

Naturdor® - Real wood veneer, Stained real wood veneer or SL (Straight line veneer).
Dekordor® - 3D (Embossed laminate) HD (Heavy Duty, continuous pressure laminate) or SD (Standard Duty, finish foil)
Laccdor - Satin white or white lacquered

IRONMONGERY & OTHERS

Lock with stainless steel front.
3" stainless steel hinges.

OPTIONS

719W or 719Y lock.
Magnetic lock.
Invisible hinges.
Automatic drop seal and chipboard interior for 32dB acoustic isolation.




ACOUSTIC

AC32dB




Notes: As we are constantly improving our product range, we reserve the right to make changes without prior notice.

VERTICAL CUT

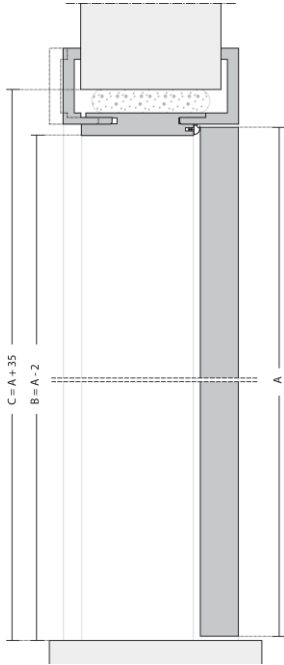


HORIZONTAL CUT

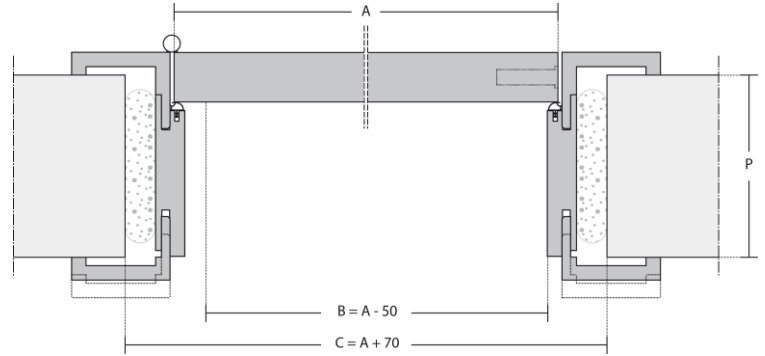


KEY

- A – Door width / height
- B – Effective clear width / height
- C – Structural opening
- P – Frame total width / height

IRONMONGERY AND OPTIONS

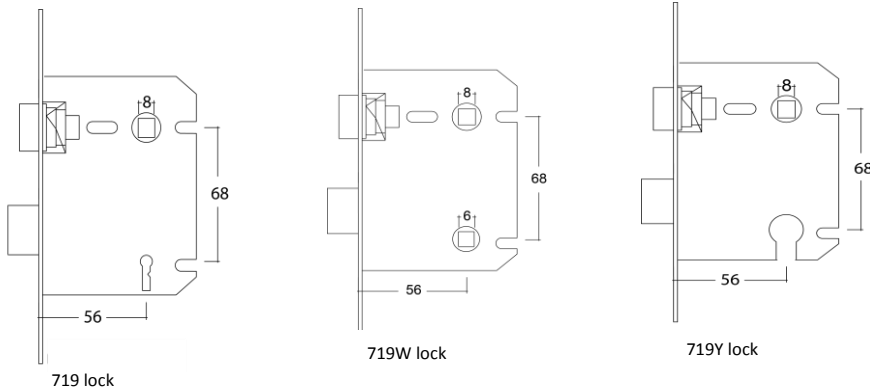

CONFIGURATIONS

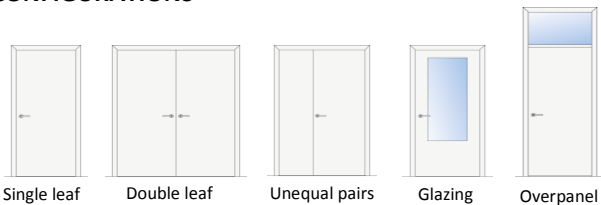

Notes: As we are constantly improving our product range, we reserve the right to make changes without prior notice.