






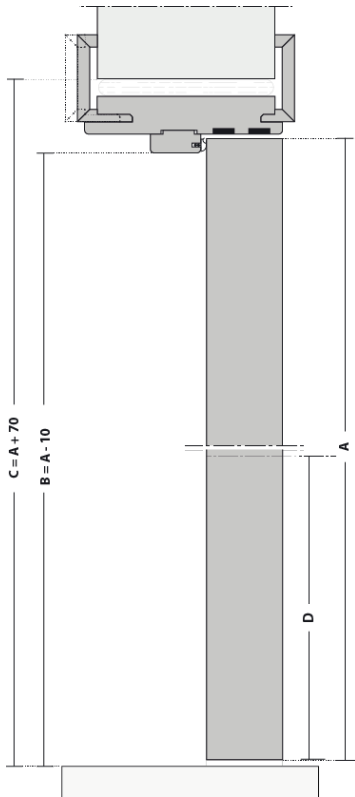



<p>GENERAL DESCRIPTION</p>	<p>Door, frame and accessories with 60 min fire resistance and acoustic insulation rating up to 35dB Product suitable for installation in places with fire resistance and acoustic insulation requirements.</p>	 <p>EI60</p>
<p>ACCREDITATION</p>	<p>Fire certification as per EN 1634-1 EI60 rating as per EN 13501-2 Acoustic insulation test as per ISO 10140 and rating as per ISO 717-1</p>	 <p>ACOUSTIC</p>
<p>DOOR</p>	<p>Rails and stiles in hardwood, vertical edge banded Interior in high density chipboard Facing In high density chipboard, features as per standard EN 13986 54mm thick</p>	 <p>RW35dB</p> <p>THRESHOLD</p>
<p>FRAME</p>	<p>Jamb in hardwood or chipboard 44mm thick Architraves in high density chipboard Double intumescent seals 15x4mm Compression seal</p>	 <p>ANTI SMOKE</p>
<p>FINISHES</p>	<p>Naturdor® - real wood veneer or stained Dekordor® 3D - embossed finish, vertical and horizontal design Dekordor® HD - hard wearing laminate Dekordor® SD - decorative foil Lacdor - Lacquered finish with approximate RAL colour</p>	
<p>IRONMONGERY</p>	<p>Stainless steel CE marked look 4" stainless steel hinges with CE marking Threshold</p>	
<p>OPTIONS</p>	<p>Double leaf option for 33dB acoustic insulation Glazing option for 34dB acoustic insulation Concealed door closer or with scissor arm Recessing for electronic lock Eye viewer Anti smoke seal</p>	
<p>ENVIRONMENTAL BENEFITS</p>	<p>Recycled content, all series FSC Certified wood, upon request</p>	<p>ACCREDITATION</p>   

Note: Depending on product features or configurations, dimensions will vary. As we are constantly improving our product range, we reserve the right to make changes without prior notice. The guarantee certificate is an integral part of the technical data sheet, available at www.vicaima.com.

VERTICAL CUT




HORIZONTAL CUT

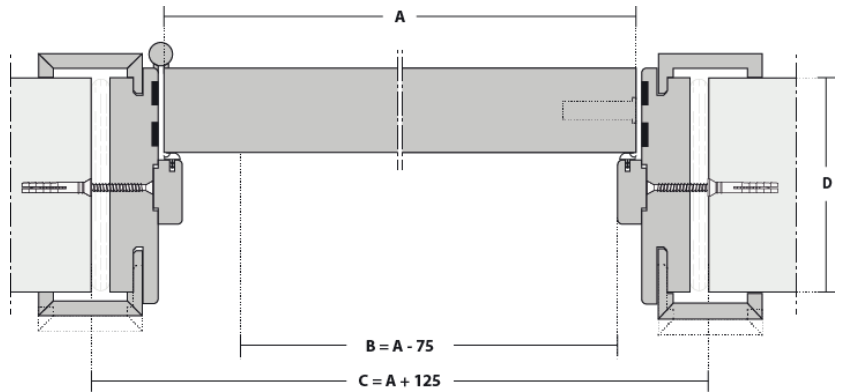

KEY


- A – Door width / height
- B – Effective clear width / height
- C – Structural opening
- P – Frame total width / height

D - HANDLE HEIGHT (mm)	DOOR THICKNESS (mm)	P - WALL THICKNESS / FRAME ADJUSTMENT (mm)
		≥ 100
1000	54	[- 5 + 10]
1050		

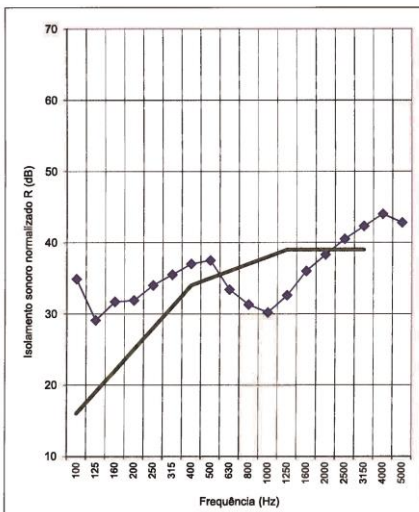

$R_w (C; C_2; C_1; 100-5000; C_2; 100-5000) = 35 (-1; -2; 0; -2)$ dB


IRONMONGERY

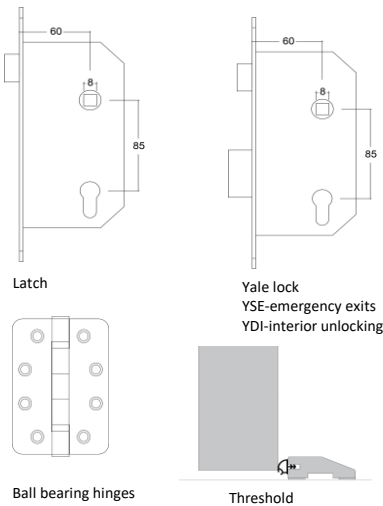

OPTIONS



CONFIGURATIONS

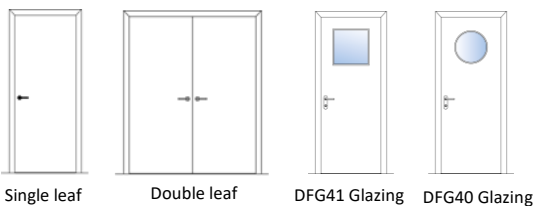

Note: Depending on product features or configurations, dimensions will vary. As we are constantly improving our product range, we reserve the right to make changes without prior notice. The guarantee certificate is an integral part of the technical data sheet, available at www.vicaima.com.