

GENERAL DESCRIPTION

This solution creates architectural simplicity with straight and continuous surfaces. In this concept, the door is in line with the architrave or wall panels, creating a seamless look

DOOR

Overall 47mm thick
Rails and stiles in softwood or engineered timber, vertical edge banded and top of the door Honeycomb core with 2.2 kg / cm² average strength or particle board, features according to EN 13986
Facing in MDF, features according to standard EN 13986
47mm thicknesses

FRAME

Jamb in plywood or MDF 28mm thick, features according to EN 13986
Fixed and adjustable architrave in plywood or MDF, features according to EN 13986
Compression seal

FINISHES

Naturdor® - real wood veneer or stained.
Dekordor® 3D - embossed finish, vertical and horizontal
Dekordor® HD - hard wearing laminate.
Dekordor® SD - decorative foil.
Lacdor - Lacquered finish with approximate RAL colour.

IRONMONGERY

Magnetic lock.
3" stainless steel lift of hinge

OPTIONS

Magnetic bathlock
Magnetic euro lock
Automatic drop seal


ENVIRONMENTAL BENEFITS

Recycled content, all series
FSC® Certified wood, upon




Note: Depending on product features or configurations, dimensions will vary. As we are constantly improving our product range, we reserve the right to make changes without prior notice. The guarantee certificate is an integral part of the technical data sheet, available at www.vicaima.com

VERTICAL CUT

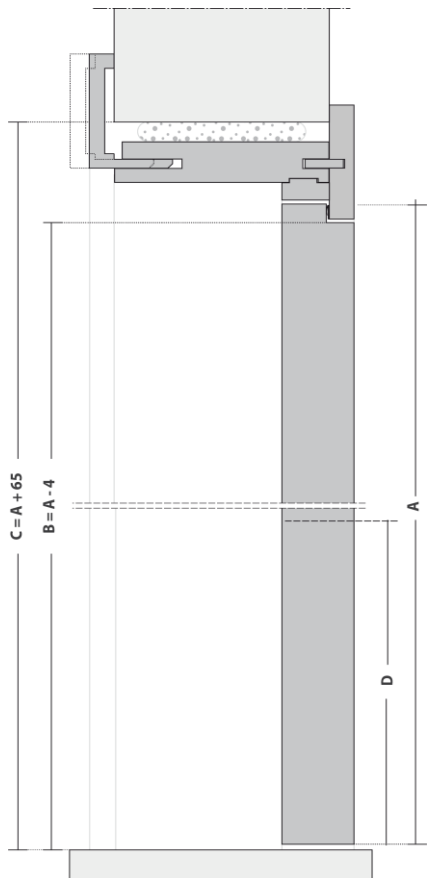

$C = A + 65$
 $B = A - 4$

HORIZONTAL CUT

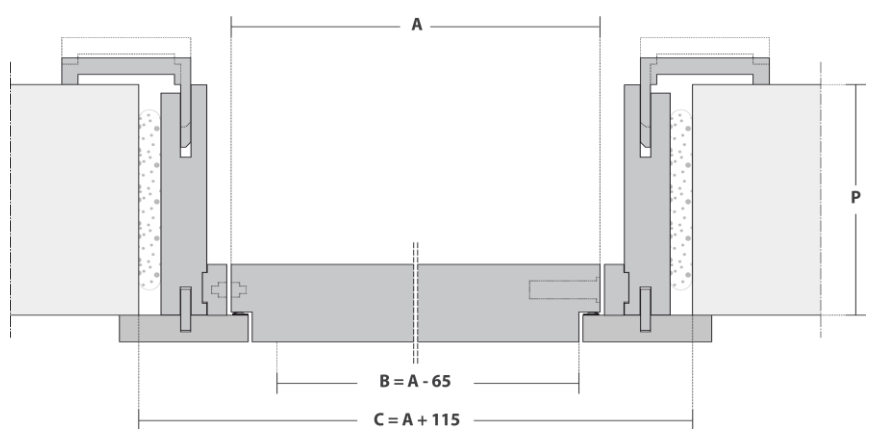


$B = A - 65$
 $C = A + 115$

KEY


- A - Door width / height
- B - Effective clear
- C - Structural opening
- D - Handle center height
- P - Wall thickness

D - HANDLE HEIGHT (mm)	DOOR THICKNESS (mm)	P - WALL THICKNESS / FRAME ADJUSTMENT (mm)	
		> 80 < 100	≥ 100
1000	47	[- 0 + 10]	[- 0 + 15]
1050			

IRONMONGERY




Magnetic lock




Ball bearing hinges


OPTIONS



Magnétic bathlock



Magnétic euro lock



Automatic drop seal


CONFIGURATIONS



Single



Double



Unequal



Glazing



Overpanel

Note: Depending on product features or configurations, dimensions will vary. As we are constantly improving our product range, we reserve the right to make changes without prior notice. The guarantee certificate is an integral part of the technical data sheet, available at www.vicaima.com