

EASY – SWING DOORS

TECHNICAL SHEET

GENERAL DESCRIPTION

Versatile, the Easy Range reflects a practical concept with specific configuration options and accessories.

FINISHES


Wooden chipboard with laminate faces. Easy to clean, scratch and stain resistant panel, it is available in plain colours and wood patterns.

DOOR

Chipboard, according to EN 13986.
 Thickness: 16mm thick
 Lipping for laminate: 0,4mm perimeter in pvc
 Height: minimum 1800mm | maximum 2500mm
 Width: minimum: 400mm | maximum 600mm


STRAIGHTENING SYSTEM

Applied on the inner side to avoid warping, see page 2.

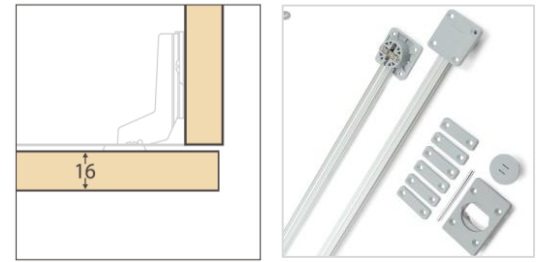


INTERIOR

Chipboard, according to EN 13986.
 Division panel, top, bottom, side: 16mm thick, edge banded 1 side
 Luggage shelf : 16mm, edged banded 1 side, with pre-drilling and screw fixing
 Shelves: 16mm thick, perimetral edge banded, pre-drilled for 64mm upper or lower shift including bracket
 Lipping: 0,4mm with matching colour pvc
 Wardrobe back in chipboard with 10mm thick, with top fixing.

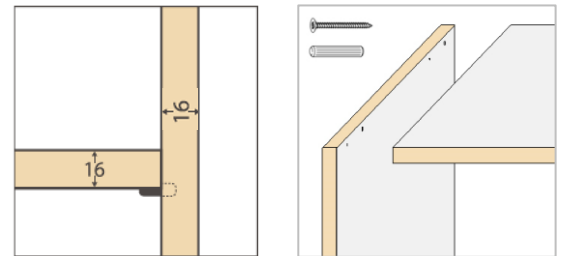


ARCHITRAVES

Chipboard, according to EN 13986.
 Thickness: 16mm | Width: 60 / 70 / 80mm
 Optional: MDF or plywood, square or rounded (1 side)

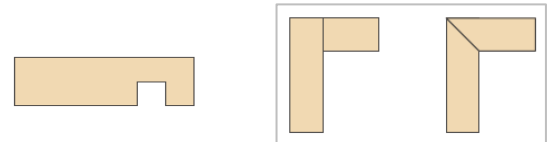


SKIRTING

Chipboard, according to EN 13986.
 Lipping: 0,4mm matching colour pvc
 Thickness: 16mm
 Width: 16 / 60 / 70 / 80mm.

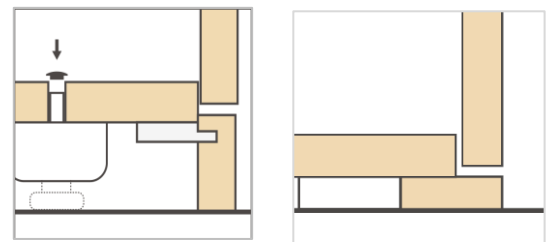


INTERIOR SKIRTING

In the inner skirting options with or without leveller, the distance from the door to the floor must be specified.

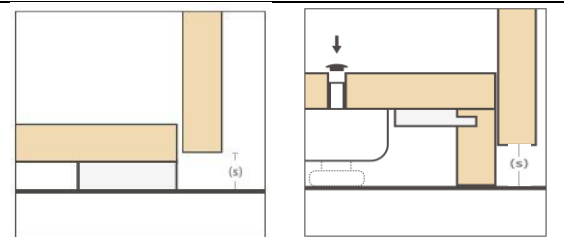

BASE LEVELLER

Circular leveller with \varnothing 48mm, interior and exterior regulation
 Height: 45mm
 Regulation: [- 0 + 15 mm]
 For skirting boards over 60mm high, appropriate sized support shims should be used.

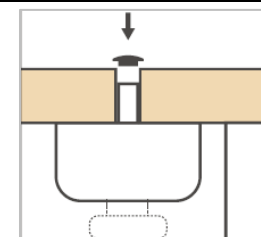

Notes: Depending on product features or configurations, dimensions will vary. As we are constantly improving our product range, we reserve the right to make changes without prior notice. The guarantee certificate is an integral part of the technical data sheet, available at www.vicaima.com

EASY – SWING DOORS


TECHNICAL SHEET

DRAWER MODEL

Chipboard, according to EN 13986.
Side and bottom panels: 16mm thick
Drawer front: 16mm thick.
Bottom drawer: 10mm thick.



TYPE - NUMBER OF DOORS

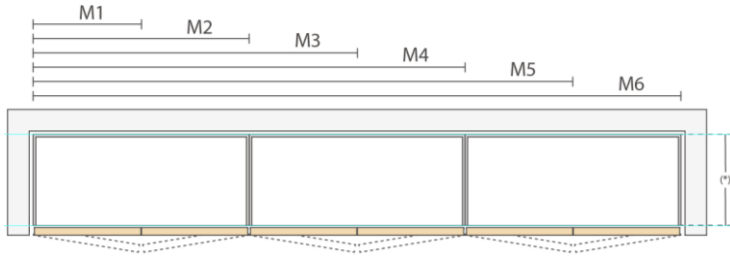

(*)INTERIOR DEPTH - PANEL + BACK (mm)

STRUCTURAL OPENING	ARCHITRAVE TYPE	INTERIOR DEPTH (*)	ARCHITRAVE TYPE	INTERIOR DEPTH (*)
450 to 499	OVERLAPPING ARCHITRAVE	425	FLUSH WITH WALL	410
500 to 549		475		460
550 to 599		525		510
600 to 649		ARCHITRAVE	575	560
650 to 699			625	610
700 to 749			675	660

HANGING RAIL AND SUPPORTS

Aluminium colour Oval hanging rail, 30x15mm.
Aluminium colour rail end supports, with pre-drilling to fix the side panels.
Aluminium colour central support, applied in the centre in 2 models, for doors with width > 500mm.



HINGES

Nickel-plated finish, square, opening at 110° with regulation and support wedge.
The number of hinges varies according to door dimensions, see table below.



SLIDING SYSTEM

Equipped with rollers and aluminium colour finish.



EASY - 16MM DOOR STRAIGHTENING RULE

HEIGHT	WIDTH			
	≤ 400	401 a 500	501 a 550	551 a 600
≤ 2300	-	-	-	1
≤ 2400	-	-	1	1
≤ 2500	-	-	1	1

HINGES - QUANTITIES PER DOOR

HEIGHT	WIDTH
	≤ 600
≤ 2000	3
≤ 2300	4
≤ 2500	5

Notes: Depending on product features or configurations, dimensions will vary. As we are constantly improving our product range, we reserve the right to make changes without prior notice. The guarantee certificate is an integral part of the technical data sheet, available at www.vicaima.com