# **ADVANCED - SWING DOORS**





### **GENERAL DESCRIPTION**

Sophistication and comfort. Featuring refined storage solutions, elegant details and diverse accessories, the wardrobes and closets from the Advanced Range confer a unique effect on the décor of spaces

#### **FINISHES**

The Advanced Range has a comprehensive selection of contemporary finishes, with emphasis upon stained and lacquered real veneers or specialist paint finishes through the Naturdor®, Naturdor® Stained, Dekordor® Shades or Lacdor ranges. All creating perfect harmony with Vicaima interior doors.

#### DOOR

Particle board or MDF optional, according to EN 13986.

Thickness: 19, optional 22mm

Dekordor® Shades: 22mm handle included Lipping for laminate: 0,8mm perimeter pvc.

Lipping for Naturdor®, Dekordor®, Lacdor: 0,2mm edge banded foil or veneer

Height: minimum 1800mm | maximum 2600mm Width: minimum: 400mm | maximum 600mm



Particle board, according to EN 13986.

Division panel, top, bottom and side: 16 or 19mm thick, edge banded 1 side, Luggage shelf: 19mm, edged banded 1 side, with pre-drilling and screw fixing Shelves: 19mm thick, perimetral edge banded, pre-drilled for 64mm upper or

lower shift including bracket

Lipping for interior with 16mm: 0,4mm pvc with matching colour Lipping for interior with 19mm: 0,8mm pvc with matching colour Wardrobe back in Particle board with 10mm thick, with top fixing.



### **ARCHITRAVES**

Particle board , optional: MDF or plywood

Dekordor® Shades in MDF

Thickness: 16mm | Width: 60 / 70 / 80mm Mitre or butt joint finish (rounded not available)




### **SKIRTING**

Particle board , optional: MDF or plywood

Lipping for laminate: 0,4mm perimeter pvc

Lipping for Naturdor®, Dekordor®, Lacdor: 0,2mm edge banded foil or veneer


Thickness: 16mm Height: 60 / 70 / 80mm.



### **INTERIOR SKIRTING**

In the interior skirting options with or without leveller, the distance from the

door to the floor must be specified (S).



### **BASE LEVELLER**


Circular leveller with Ø 48mm, adjustable interior or exterior

Height: 45mm

Regulation: [- 0 + 15 mm]

For skirting boards over 60mm high, appropriate sized support wedges should

be used.



Notes: Depending on product features or configurations, dimensions will vary. As we are constantly improving our product range, we reserve the right to make changes without prior notice.

# **ADVANCED - SWING DOORS**


TECHNICAL SHEET




### **DRAWER / DEEP DRAWER MODULE**

Particle board, according to EN 13986. Side and bottom panels: 16mm thick

Drawer front: 19mm thick.
Drawer bottom: 10mm thick.



### **TYPE - NUMBER OF DOORS**

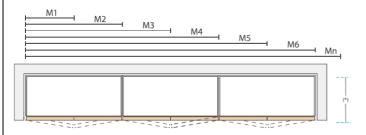



INTERIOR DEPTH (BUILDING)	ARCHITRAVE TYPE	INTERIOR DEPTH (*)	ARCHITRAVE TYPE	INTERIOR DEPTH (*)
450 to 499	Overlapping architrave	425	Door or architrave flush with wall	410
500 to 549		475		460
550 to 599		525		510
600 to 649		575		560
650 to 699		625		610
700 to 749		675		660

### HANGING RAIL AND SUPPORTS

Aluminium colour oval hanging rail, 30x15mm.

Aluminium colour rail end supports, with pre-drilling to fix the side panels Aluminium colour central support, applied in the centre in 2 models, for doors with width > 500mm.











### HINGES

Nickel-plated finish, square or rounded, opening at 110° with regulation and support wedge.

Optional: slow motion hinges

The number of hinges varies according to the door dimensions, see table below.






### **CONCEALED SLIDING SYSTEM**

Concealed in galvanized steel with various features

Features: partial extraction Closing: soft or push system. Features: full extraction Closing: soft or push system.





### **ACCESSORIES**

Pull-out hanging rail: Stainless chrome. Load capacity up to 12 Kg

Pull-out trouser rack: Composed by 11 chromed steel supports with full extraction slides.





## ADVANCED - 19 / 22MM DOOR STRAIGHTENING RULE

HEIGHT	WIDTH			
	≤ 400	401 a 500	501 a 550	551 a 600
≤ 2300	-	-	-	-
≤ 2400	-	-	-	1
≤ 2500	-	-	-	1
≤ 2600	-	-	1	1



HINGES - QUANTITIES PER DOOR				
	WIDTH			
	WIDIT			

	WIDTH
HEIGHT	≤ 600
≤ 2000	3
≤ 2300	4
≤ 2500	5
≤ 2600	6

Notes: Depending on product features or configurations, dimensions will vary. As we are constantly improving our product range, we reserve the right to make changes without prior notice.