

CONTACTS

Vicaima Ltd
Marlowe Avenue, Greenbridge Ind. Est.
Swindon, Wiltshire SN3 3JF
United Kingdom

01793 532333
info@vicaima.com

vicaima.com



Follow us




Primed 2 Go



Ready to Paint.

vicaima
UNEXPECTED HARMONY

Primed 2 Go

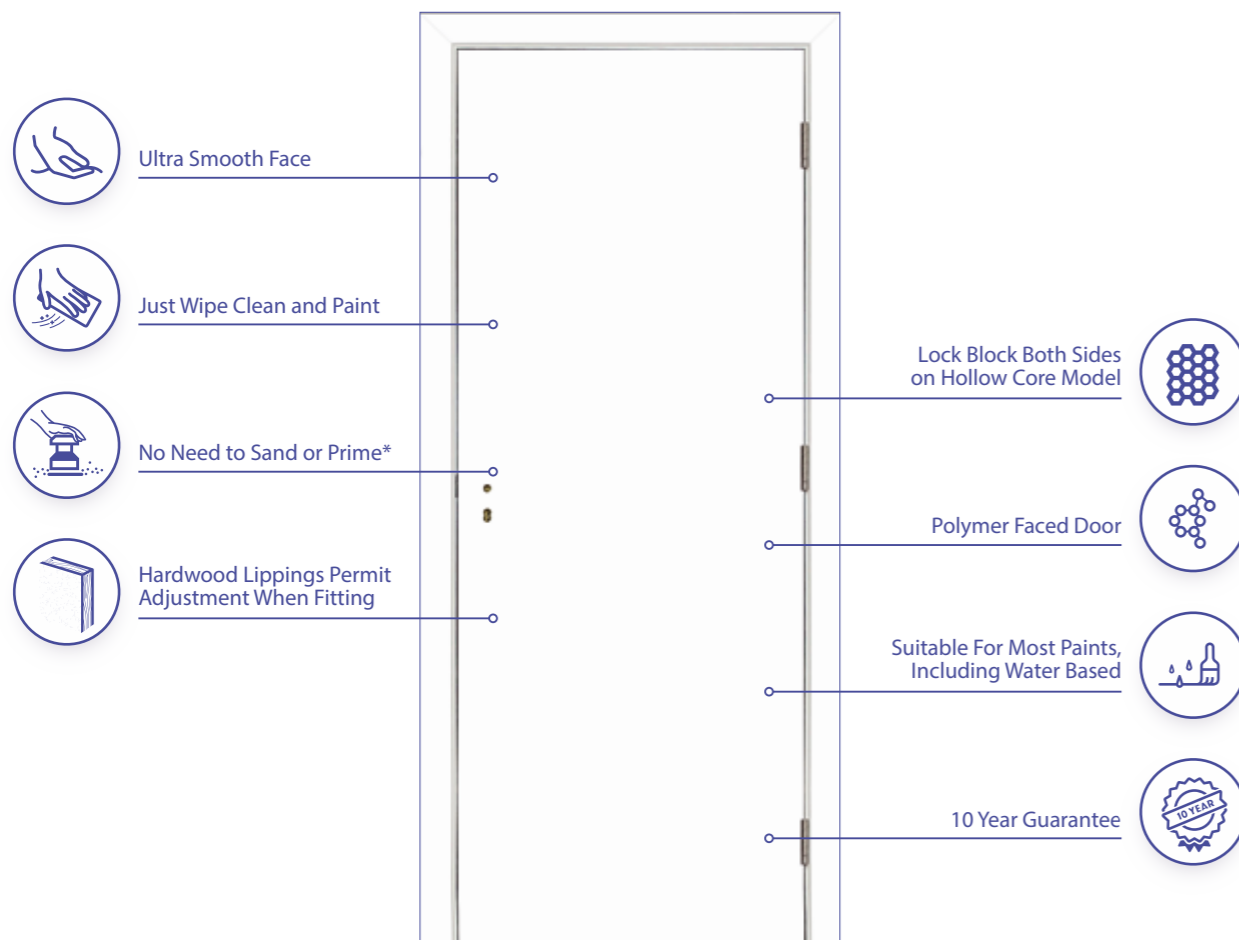

Painting doors just got easier with all new **Primed 2 Go** from Vicaima. With its revolutionary new surface finish, Primed 2 Go reduces time on site and saves money by removing the need to sand or prime the face of doors before painting. In addition, its ultra-smooth and opaque polymer face, ensures that a professional finish can be achieved with ease. Developed to accept a wide range of modern paints, including water based applications, **Primed 2 Go** only requires the face surface to be wiped clean before painting can commence, thereby reducing time and money on-site

As a Vicaima product, **Primed 2 Go** is manufactured to the same high standard as all our doors. Non-fire rated hollow core doors have lock blocks on both sides making installation fully reversible and for performance applications these doors are also available in both half-hour FD30 and one-hour FD60 rated. All hollow core and FD30 doors have timber rails and are lipped on two edges*. **Primed 2 Go** doors are also available in both glazed options and with decorative grooves where desired.

Make life easy for yourself with Primed 2 Go:

- Reduces site cost and time
- Less materials required to complete finishing
- No face sanding required
- Easy to achieve a professional finish
- Ultra-smooth and opaque surface
- New polymer face will accept wide range of paint types
- Tested to EN ISO 2409/DIN 53151 – grade 0-1
- All Primed 2 Go products are FSC® Certified



The mark of responsible forestry


* Timber lipping will require treatment after fitting on site.

Performance Options

Primed 2 Go doors can also be supplied within our standard primed Easi-Fit door kit, including Security SBD options.



Vicaima tested and approved FD30 and FD60 Fire Doors

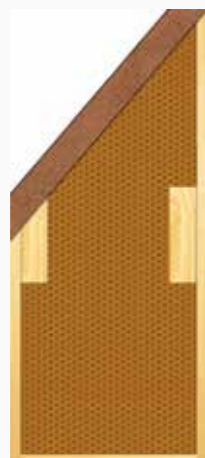

Hollow Core 35/40/44mm



Solid Core 44mm FD30



Solid Core 54mm FD60

