

FD60(S) 54MM

HSP HIGH DENSITY CORE

TECHNICAL DATA SHEET

vicaima
UNEXPECTED HARMONY

FIRE RATING

FD60(S) high density core 54mm to BS 476 Part 22:1987, when intumescent seals or intumescent/smoke seals are fitted to door leaf or door frame/lining as test certification (details on request). Fitted `Q` mark fire plug (BM TRADA) and also Certifire label (BWF - Fire Door Alliance).

DURABILITY

Tested to severe duty BS EN 1192/DD171 Class 4

DOOR

Overall 54mm thick

HSP high density core

Lippings in hardwood all edges (concealed by face) requires finishing on site after sizing

Optional edge banding available MTO except for Laccor Satin white, Visual Sensations CDW Alpine and Forest, which are edge banded as standard.

FINISHES

Naturdor® - Real wood veneer, Stained real wood veneer

Dekordor® 3D - Embossed grain effect finish

Dekordor® HD - Heavy Duty, continuous pressure laminate (CPL)

Dekordor® SD - Standard Duty, finish foil

Laccor - Satin white or white lacquered

OPTIONS

Factory glazing - If required and as specified in accordance with test certification. Max 0.82 m² total area. Glazed 10mm clear fd60 glass.

"V" groove 3X1.5mm or inlays (vertical or horizontal)

Oversized doors

PACKAGING

Cardboard one side and polythene wrapped apart from primed and paintgrade which are unwrapped.

DOOR KIT AND SET SYSTEMS


This product may be used in conjunction with a Vicaima Portaro® or Easi-Fit door kit system.

Please note: Some specific finishes/ranges may differ slightly from the information shown above, please check with our Technical Department for further details.



FD60

DOOR CONSTRUCTION

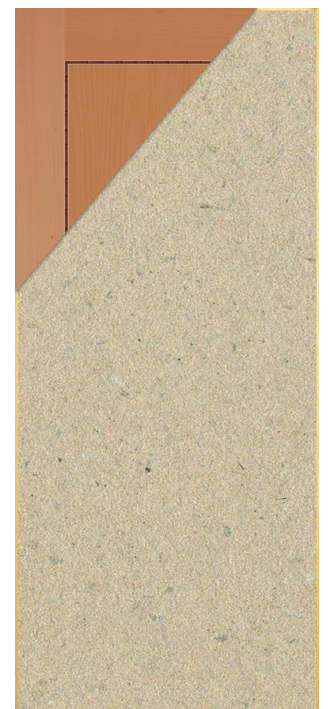

Note: Door image represents core construction only and not face finish



Note: Depending on product features or configurations, dimensions will vary. As we are constantly improving our product range, we reserve the right to make changes without prior notice. The guarantee certificate is an integral part of the technical data sheet, available at www.vicaima.com