

PORTARO® FD60 AC33

VCP HIGH DENSITY CORE

TECHNICAL DATA SHEET

vicaima
UNEXPECTED HARMONY

FIRE AND ACOUSTIC RATING

Product which integrates door, frame and ironmongery, tested by accredited laboratories as resistant to fire 60 minutes according to BS476 Part22:1987 standard and for acoustic insulation up to 33dB as per ISO717-1 standard.

DURABILITY

Tested to severe duty BS EN 1192

DOOR

Overall 54mm thick

Vicpan®60 high density core

Lippings in hardwood all edges, vertical lippings are edge banded

FRAME

Frame in MR MDF, jamb 28mm thick

Fixed and adjustable architrave

Double fire seals 15x4mm to the jambs and 20x4mm to the head

Compression seal

FINISHES

Naturdor® - Real wood veneer, Stained real wood veneer

Dekordor® 3D - Embossed grain effect finish

Dekordor® HD - Heavy Duty, continuous pressure laminate (CPL)

Dekordor® SD - Standard Duty, finish foil

Lacdor - Satin white or white lacquered

IRONMONGERY & OTHERS

Stainless steel CE marked, hinges

Stainless steel CE marked latch

Threshold or automatic drop seal

OPTIONS

Fire, smoke and acoustic seals 15x4mm to the jambs and 20x4mm to the head

Handle



FIRE

FD60



ACOUSTIC



PANEL

RW35dB



THRESHOLD

RW33dB



DROP SEAL

RW33dB

OPTIONAL



ANTI SMOKE SEAL

ANTI SMOKE

bmtrada
Proud to be part of **element**



The mark of responsible forestry



MOBILITY

Notes: Depending on product features or configurations, dimensions will vary. As we are constantly improving our product range, we reserve the right to make changes without prior notice. The guarantee certificate is an integral part of the technical data sheet, available at www.vicaima.com.


PORTARO® FD60 AC33

VCP HIGH DENSITY CORE


TECHNICAL DATA SHEET

vicaima
UNEXPECTED HARMONY

VERTICAL CUT

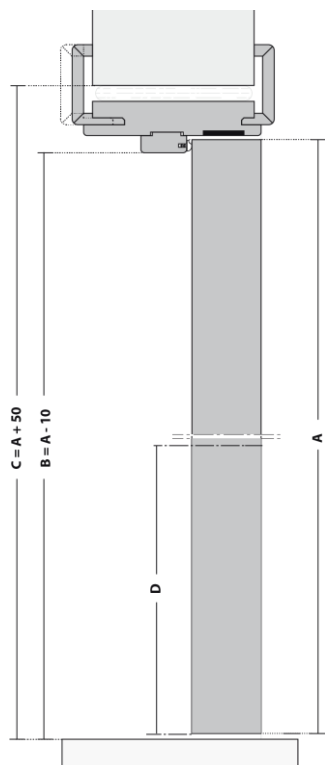

HORIZONTAL CUT

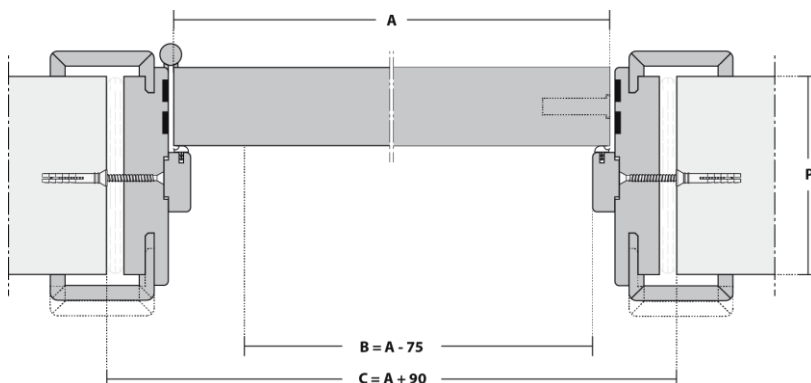

KEY

- A - Door width / height
- B - Effective clear width / height
- C - Structural opening
- D - Wall thickness
- D - Handle height


E - Handle Height (mm)	Door Thickness (mm)	D - Wall Thickness / Frame Adjustment (mm)
		≥ 90
1000	54	[-5 + 10]

Notes: Dimensions in millimetres.

(B) Effective clear width/height, calculated considering door opened to 95° excluding the handle dimension. Depending on product features or configurations, dimensions will vary.

IRONMONGERY AND OPTIONS

STANDARD

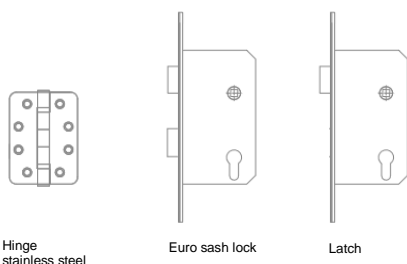

CONFIGURATIONS



Notes: Depending on product features or configurations, dimensions will vary. As we are constantly improving our product range, we reserve the right to make changes without prior notice. The guarantee certificate is an integral part of the technical data sheet, available at www.vicaima.com.