

PORTARO® FD60

VCP HIGH DENSITY CORE

TECHNICAL DATA SHEET

vicaima
UNEXPECTED HARMONY

FIRE RATING

Product resistant to fire 60 minutes, which integrates door, frame and ironmongery, tested by accredited laboratories in accordance with BS 476 Part 22:1987 standards.

DURABILITY

Tested to severe duty BS EN 1192

DOOR

Overall 54mm thick

Vicpan®60 high density core

Lippings in hardwood all edges, vertical lippings are edge banded

FRAME

Frame in MR MDF, jamb 28mm thick

Fixed and adjustable architrave

Double fire seals 15x4mm to the jambs and 20x4mm to the head

Compression seal

FINISHES

Naturdor® - Real wood veneer, Stained real wood veneer

Dekordor® 3D - Embossed grain effect finish

Dekordor® HD - Heavy Duty, continuous pressure laminate (CPL)

Dekordor® SD - Standard Duty, finish foil

Laccdor - Satin white or white lacquered

IRONMONGERY & OTHERS

Stainless steel CE marked, hinges

Stainless steel CE marked latch

OPTIONS

Fire, smoke and acoustic seals 15x4mm to the jambs and 20x4mm to the head

Double leaf with square or equal rebated meeting stiles

Overpanels

Factory glazed, max 0.76 m² total area. Glazed 10mm clear fd60 glass

"V" groove 3X1.5mm or inlays (vertical)

Automatic drop seal

Handle



FD60

OPTIONAL



ANTI SMOKE

bmtrada
Proud to be part of **element**




The mark of responsible forestry




MOBILITY

Notes: Depending on product features or configurations, dimensions will vary. As we are constantly improving our product range, we reserve the right to make changes without prior notice. The guarantee certificate is an integral part of the technical data sheet, available at www.vicaima.com.

VERTICAL CUT

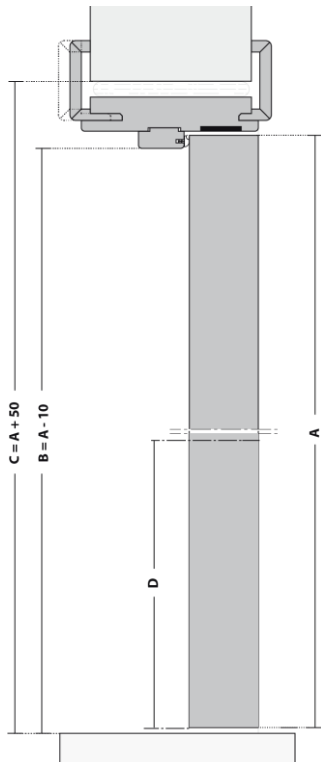

HORIZONTAL CUT

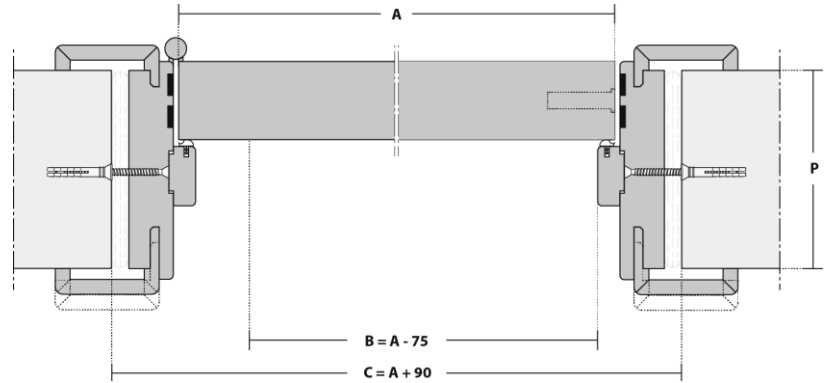

KEY

- A - Door width / height
- B - Effective clear width / height
- C - Structural opening
- P - Wall thickness
- D - Handle height


E - Handle Height (mm)	Door Thickness (mm)	D - Wall Thickness / Frame Adjustment (mm)
1000	54	≥ 90
		[-5 + 10]

Notes: Dimensions in millimetres.


(B) Effective clear width/height, calculated considering door opened to 95° excluding the handle dimension. Depending on product features or configurations, dimensions will vary.

IRONMONGERY AND OPTIONS

STANDARD

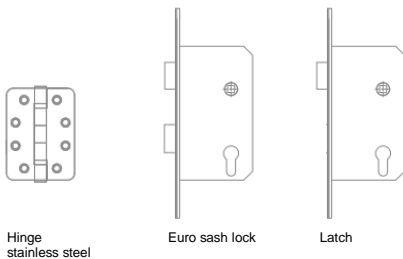

CONFIGURATIONS

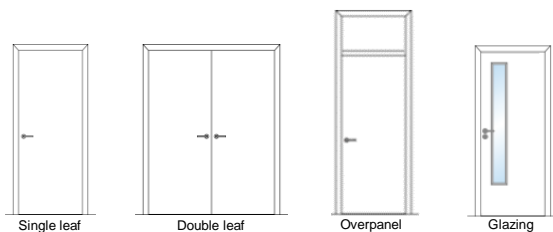

Notes: Depending on product features or configurations, dimensions will vary. As we are constantly improving our product range, we reserve the right to make changes without prior notice. The guarantee certificate is an integral part of the technical data sheet, available at www.vicaima.com.