

GENERAL DESCRIPTION

Door, frame and accessories with 30 min fire resistance rating.
Double leaf, overpanel and glazing options.
Product suitable for installation in places with fire resistance requirements.

ACCREDITATION

Fire certification as per BS 476 PART 22.
FD30 rating as per BS 476 PART 22.

DOOR

Perimeter structure in wood rails and stiles, chipboard interior with characteristics as per EN 13986.
MDF facing, features as per standard EN 13986.
Lippings in dense wood, wood veneer, finish foil or painted to match the facing.
Thickness: 44 mm.
Available in models from the Essential, Exclusive and Classic ranges.
Chipboard or fibre panels and profiles in wood or with a finish to match facing.

FRAME

Plywood, chipboard or wood fibre (MDF) jamb, features according to EN 13986.
Plywood, chipboard or wood fibre (MDF) adjustable architrave, features according to EN 13986.
Intumescent seals and strips with specifications according to performed test.
Rubber seal.

FINISHES

Naturdor® - Real wood veneer, Stained real wood veneer or SL (Straight line veneer)
Dekordor® - 3D (Embossed laminate) HD (Heavy Duty, continuous pressure laminate) or SD (Standard Duty, finish foil)
Laccdor - Satin white or white lacquered

IRONMONGERY & OTHERS

Stainless steel CE marked YSE lock for emergency exits.
Stainless steel CE marked YDI lock with interior unlocking.
4" stainless steel CE marked hinges.

OPTIONS

Invisible door closer or with scissor arm.
Invisible hinges.
Automatic drop seal for 2,1W/m²k heat transmission coefficient.
Eye viewer.
Anti panic bar.
Anti smoke seal.



FIRE

FD30



ANTI SMOKE SEAL

ANTI SMOKE



THERMAL TRANSMISSION

2,1 W/m² K




The mark of responsible forestry




MOBILITY

Notes: As we are constantly improving our product range, we reserve the right to make changes without prior notice.

VERTICAL CUT

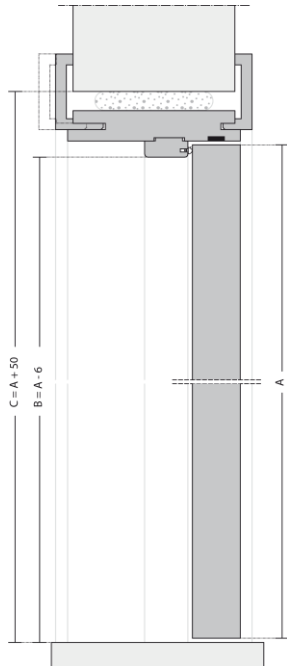


HORIZONTAL CUT

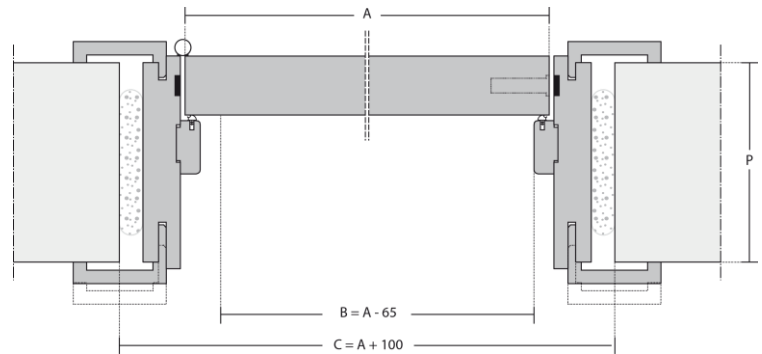


KEY

- A – Door width / height
- B – Effective clear width / height
- C – Structural opening
- P – Frame total width / height

IRONMONGERY AND OPTIONS

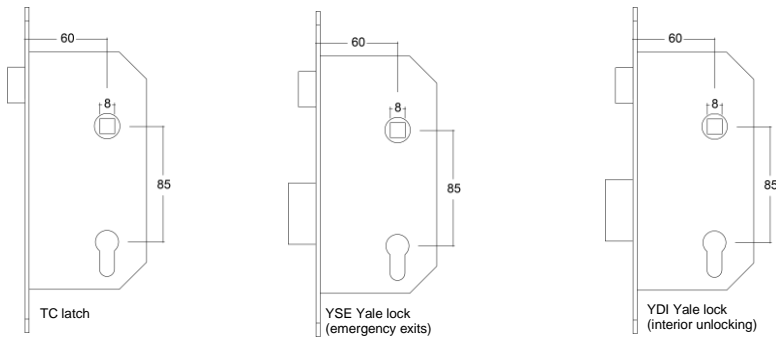

CONFIGURATIONS

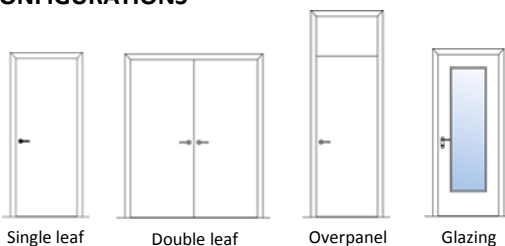

Notes: As we are constantly improving our product range, we reserve the right to make changes without prior notice.